

PLYMOVENT®

PRODUCT DESCRIPTION

BSAB no: T0.7
Ser.no: EF - 1
Date: 961201
Replace:

Exhaust hose- EF

© Copyright 1996: All rights reserved. Nothing from this publication may be reproduced, handed over, copied, or translated into other language, in any form or means without written permission from PlymoVent AB. PlymoVent AB reserves the right to make design changes. For more information contact PlymoVent customer service; Tel +46 40 30 31 30, Fax +46 40 30 31 40.

Tubo, +300°C

Applicazione

Il tubo mod. EF resiste al calore e viene utilizzato per aspirare i gas di scarico da motori diesel e benzina.

E' idoneo all'uso con gli arrotolatori, nelle postazioni fisse o con le canaline.

Specifications

A distinct, very light and flexible exhaust hose. Made of a single layer of specially coated kevlar fabric which has a high temperature resistance. The kevlar fabric is mechanically joined to an outer steel coil which has been coated in a tough, heat resistant, soft plastic material in order to guard against impact as well as wear and tear. The exhaust hose contains no glass fibre or asbestos.


Temperature resistance: -30°C to +300°C continuously
+330°C intermittently

Colore: Spirale gialla (RAL 1004) su sfondo nero - cosa che rende il tubo molto visibile

Il tubo è altamente resistente agli agenti chimici contenuti nei fumi di scarico, nel particolato diesel, alla benzina, al petrolio e ai solventi in genere.

Technical data

| Diametro mm | Peso g/mm | Raggio d'azione mm | Depressione kPa a 20°C | Comprimibilità in % |
|----------------|--------------|--------------------------|---------------------------|---------------------|
| 76 | 480 | 45 | 14.0 | 20 |
| 102 | 640 | 60 | 8.0 | 20 |
| 127 | 790 | 75 | 5.0 | 20 |
| 152 | 1230 | 90 | 3.6 | 20 |
| 200 | 1670 | 120 | 2.0 | 20 |

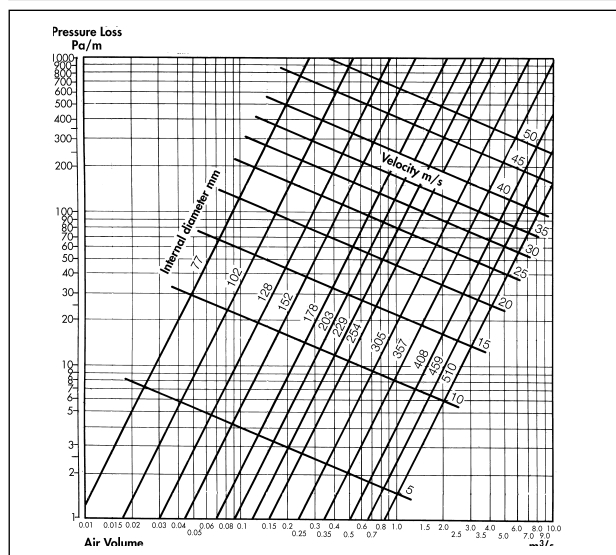

| Prod. no. | Descrizione | Dimensioni | Peso |
|-------------|-------------|----------------------|---------|
| EF-75-5 | Tubo | L = 5 m, Ø 75 mm | 2.4 kg |
| EF-100-5 | Tubo | L = 5 m, Ø 100 mm | 3.2 kg |
| EF-125-5 | Tubo | L = 5 m, Ø 125 mm | 4.0 kg |
| EF-150-5 | Tubo | L = 5 m, Ø 150 mm | 6.2 kg |
| EF-75-7.5 | Tubo | L = 7.5 m, Ø 75 mm | 3.6 kg |
| EF-100-7.5 | Tubo | L = 7.5 m, Ø 100 mm | 4.8 kg |
| EF-125-7.5 | Tubo | L = 7.5 m, Ø 125 mm | 5.9 kg |
| EF-150-7.5 | Tubo | L = 7.5 m, Ø 150 mm | 9.3 kg |
| EF-75-10 | Tubo | L = 10 m, Ø 75 mm | 4.8 kg |
| EF-100-10 | Tubo | L = 10 m, Ø 100 mm | 6.4 kg |
| EF-125-10 | Tubo | L = 10 m, Ø 125 mm | 7.9 kg |
| EF-150-10 | Tubo | L = 10 m, Ø 150 mm | 12.3 kg |
| EF-75-12.5 | Tubo | L = 12.5 m, Ø 75 mm | 6.0 kg |
| EF-100-12.5 | Tubo | L = 12.5 m, Ø 100 mm | 8.0 kg |
| EF-125-12.5 | Tubo | L = 12.5 m, Ø 125 mm | 9.9 kg |
| EF-150-12.5 | Tubo | L = 12.5 m, Ø 150 mm | 15.4 kg |

PLYMOVENT®

PlymoVent AB, Föreningsgatan 37,
S-211 52 Malmö, SWEDEN

Tel +46 (0)40 30 31 30, Fax +46 (0)40 30 31 40

Importatore in esclusiva per l'Italia:

AIRUM srl - via dell'Idraulico 4 - 40138 Bologna
Tel +39/051/60.25.072 - Fax +39/051/53.47.78
info@airum.com - www.airum.com